




OPRAWY LED / LED FIXTURES


LED NEXTRACK

NT3 | nexus
BIAŁY / WHITE PRO LIGHT 



- zasilanie: 230V AC (poprzez adapter na szynę 3-fazową),
- kompatybilność z szynoprzewodami Global Trac, Unipro, itp.
- dostępne kąty rozsyłu światła: 15°, 25°, 35°, 45°, 60°,
- w skład oprawy wchodzi wbudowane lampy LED klasy A++ - A,
- nie można wymieniać lamp w oprawie.

- power: 230V AC (through the adaptor for 3-phase track),
- compatible with Global Trac, Unipro, etc.
- beam angles in our offer: 15°, 25°, 35°, 45°, 60°,
- fixture includes built-in class A++ - A LED lamps,
- lamps are unchangeable.

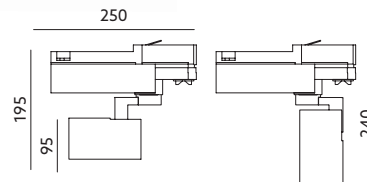

MODEL	POBÓR MOCY [W]	TEMPERATURA BARWOWA [K]	WSPÓŁCZYNNIK ODDAWANIA BARW	STRUMIEŃ ŚWIETLNY LED [lm]	STRUMIEŃ ŚWIETLNY OPRAWY [lm]	ZASTOSOWANA DIODA LED	WAGA NETTO [kg]	PAKOWANIE [szt.]
MODEL	POWER [W]	COLOR TEMPERATURE [K]	COLOR RENDERING INDEX	LUMINOUS FLUX OF LED	LUMINOUS FLUX OF THE FIXTURE [lm]	APPLIED LIGHT SOURCE	NET WEIGHT [kg]	PACKING [pcs.]
LED NEXTRACK NT3	35	3000	RA≥90	3900	2800	CITIZEN CLU038	1,07	8
LED NEXTRACK NT3	35	3200	RA≥95	2950	2200	CITIZEN VIVID	1,07	8
LED NEXTRACK NT3	35	3400	RA≥95	2950	2200	CITIZEN VIVID	1,07	8
LED NEXTRACK NT3	35	4000	RA≥90	3900	2800	CITIZEN CLU038	1,07	8

