


Oprawa liniowa hermetyczna / Waterproof linear fixture LED NEXFORCE N2 Kobi Pro



zewewnętrzny przyłącz
external connection

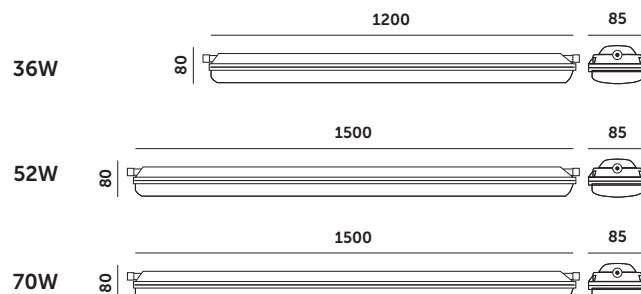

- oprawa hermetyczna z wbudowanymi diodami LED,
- obudowa i klosz mleczny wykonane z poliwęglanu,
- kąt rozsyłu światła: 120 stopni,
- można łączyć oprawy:
 - 36W – max. 22 szt.
 - 52W – max. 17 szt.
 - 70W – max. 11 szt.
- możliwość 4-stopniowej regulacji mocy, za pomocą suwaków na zasilaczu,
- oprawa zawiera źródła światła o klasie energetycznej B,
- możliwość wymiany źródła światła LED jedynie przez wykwalifikowany personel.

- hermetic fixture with built-in LEDs,
- housing and milk-white lens made of polycarbonate,
- light distribution angle: 120 degrees,
- fixtures can be connected together:
 - 36W – max. 22 pcs.
 - 52W – max. 17 pcs.
 - 70W – max. 11 pcs.
- 4-level power adjustment possible via switches on the power supply,
- fixture contains light sources with energy efficiency class B,
- LED light source can only be replaced by qualified personnel.

MODEL	SKU	POBÓR MOCY [W]	TEMPERATURA BARWOWA [K]	STRUMIEŃ ŚWIETLNY [lm]	WAGA NETTO [kg]	PAKOWANIE [szt.]	KOD EAN
MODEL	SKU	POWER [W]	COLOR TEMPERATURE [K]	LUMINOUS FLUX [lm]	NET WEIGHT [kg]	PACKING [pcs.]	BARCODE
LED NEXFORCE N2 MAX. 36W 3CCT	001726	36/32/28/22	3CCT 3000/4000/5700	6300/5440/4760/3740	1,29	9	5902201386288
LED NEXFORCE N2 MAX. 52W	001727	52/46/38/32	4000	9000/7820/6460/5440	1,63	9	5902201386295
LED NEXFORCE N2 MAX. 70W 3CCT	001728	70/60/50/40	3CCT 3000/4000/5700	12000/10200/8500/6800	1,63	9	5902201386301

