

Oprawa drogowa / Street light


Solar LED STREET 3CCT IP65

Kobi Premium




20W

40W



20W

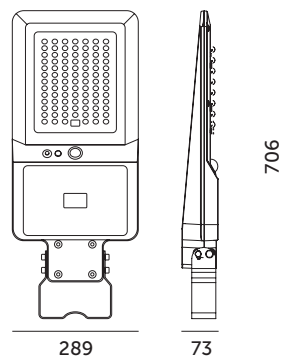

40W

- ledowa oprawa solarna z czujnikiem ruchu PIR i zmierzchowym,
- zasilana energią słoneczną,
- obudowa lampy wykonana z tworzywa sztucznego ABS, osłona z poliwęglanu PC,
- kąt / zasięg detekcji:
20W: 120 stopni / max. 6m,
40W: 120 stopni / max. 12m,
- 3 barwy światła do wyboru: ciepłobiała (3000K), neutralna biała (4000K) i zimnobiała (6000K),
- montaż na słupach Ø50-60mm lub na wysięgnikach Ø40-50mm,
- możliwość regulacji oprawy o 30 stopni,
- kąt rozsytu światła oprawy: 140x70 stopni,
- moc instalacji fotowoltaicznej:
20W: 12,5 Wp,
40W: 25 Wp,
- optymalna wysokość montażu: 3-5m,
- zawiera wymienny akumulator
20W: Li-ion 7,4V / 5400mAh,
40W: LiFe P04 9,6V / 12 000mAh,
- nie można wymienić lamp w oprawie.

- LED solar fixture with PIR motion sensor and dusk sensor,
- powered by solar energy,
- lamp housing made of ABS plastic, cover made of polycarbonate (PC),
- detection angle:
20W: range: 120 degrees / up to 6 m,
40W: range: 120 degrees / up to 12 m,
- three light color options: warm white (3000K), neutral white (4000K), and cool white (6000K),
- installation on poles Ø50-60 mm or brackets Ø40-50 mm,
- fixture adjustable by 30 degrees,
- fixture light distribution angle: 140 x 70 degrees,
- photovoltaic installation power:
20W: 12,5 Wp,
40W: 25 Wp,
- optimal mounting height: 3-5 m,
- includes a replaceable battery :
20W: Li-ion 7,4V / 5400mAh,
40W: LiFe P04 9,6V / 12 000mAh,
- lamps in the fixture are non-replaceable.

MODEL	SKU	POBÓR MOCY [W]	TEMPERATURA BARWOWA [K]	STRUMIEŃ ŚWIETLNY [lm]	WAGA NETTO [kg]	PAKOWANIE [szt.]	KOD EAN
MODEL	SKU	POWER [W]	COLOR TEMPERATURE [K]	LUMINOUS FLUX [lm]	NET WEIGHT [kg]	PACKING [pcs.]	BARCODE
SOLAR LED STREET 20W 3CCT	004613	20	3CCT 3000/4000/6000	3000	1,63	8	5907178016381
SOLAR LED STREET 40W 3CCT	004744	40	3CCT 3000/4000/6000	6000	4,09	2	5907178017593

